

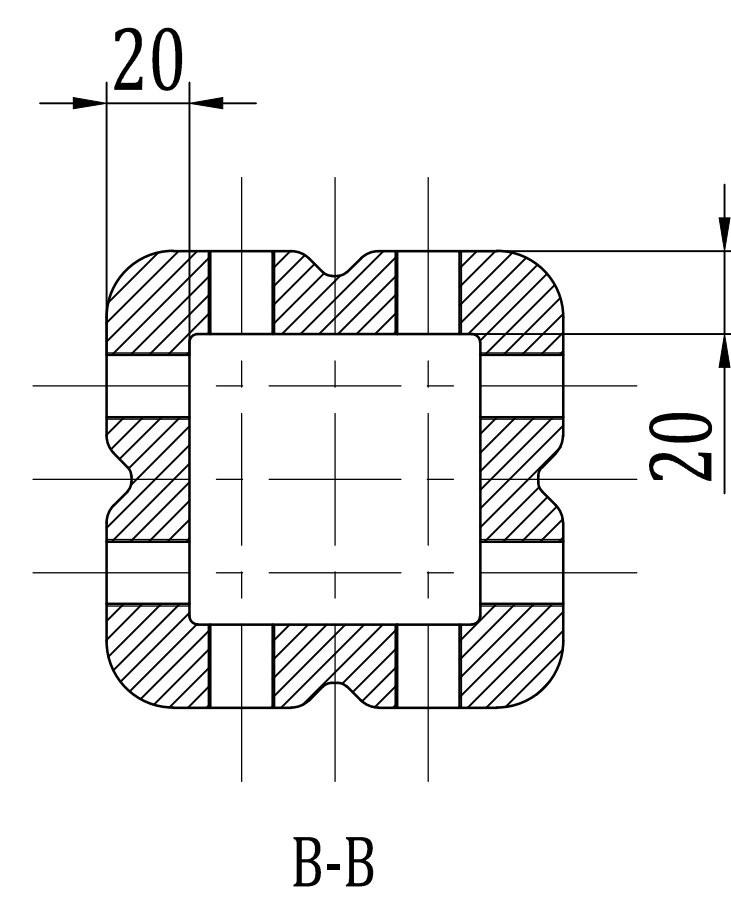
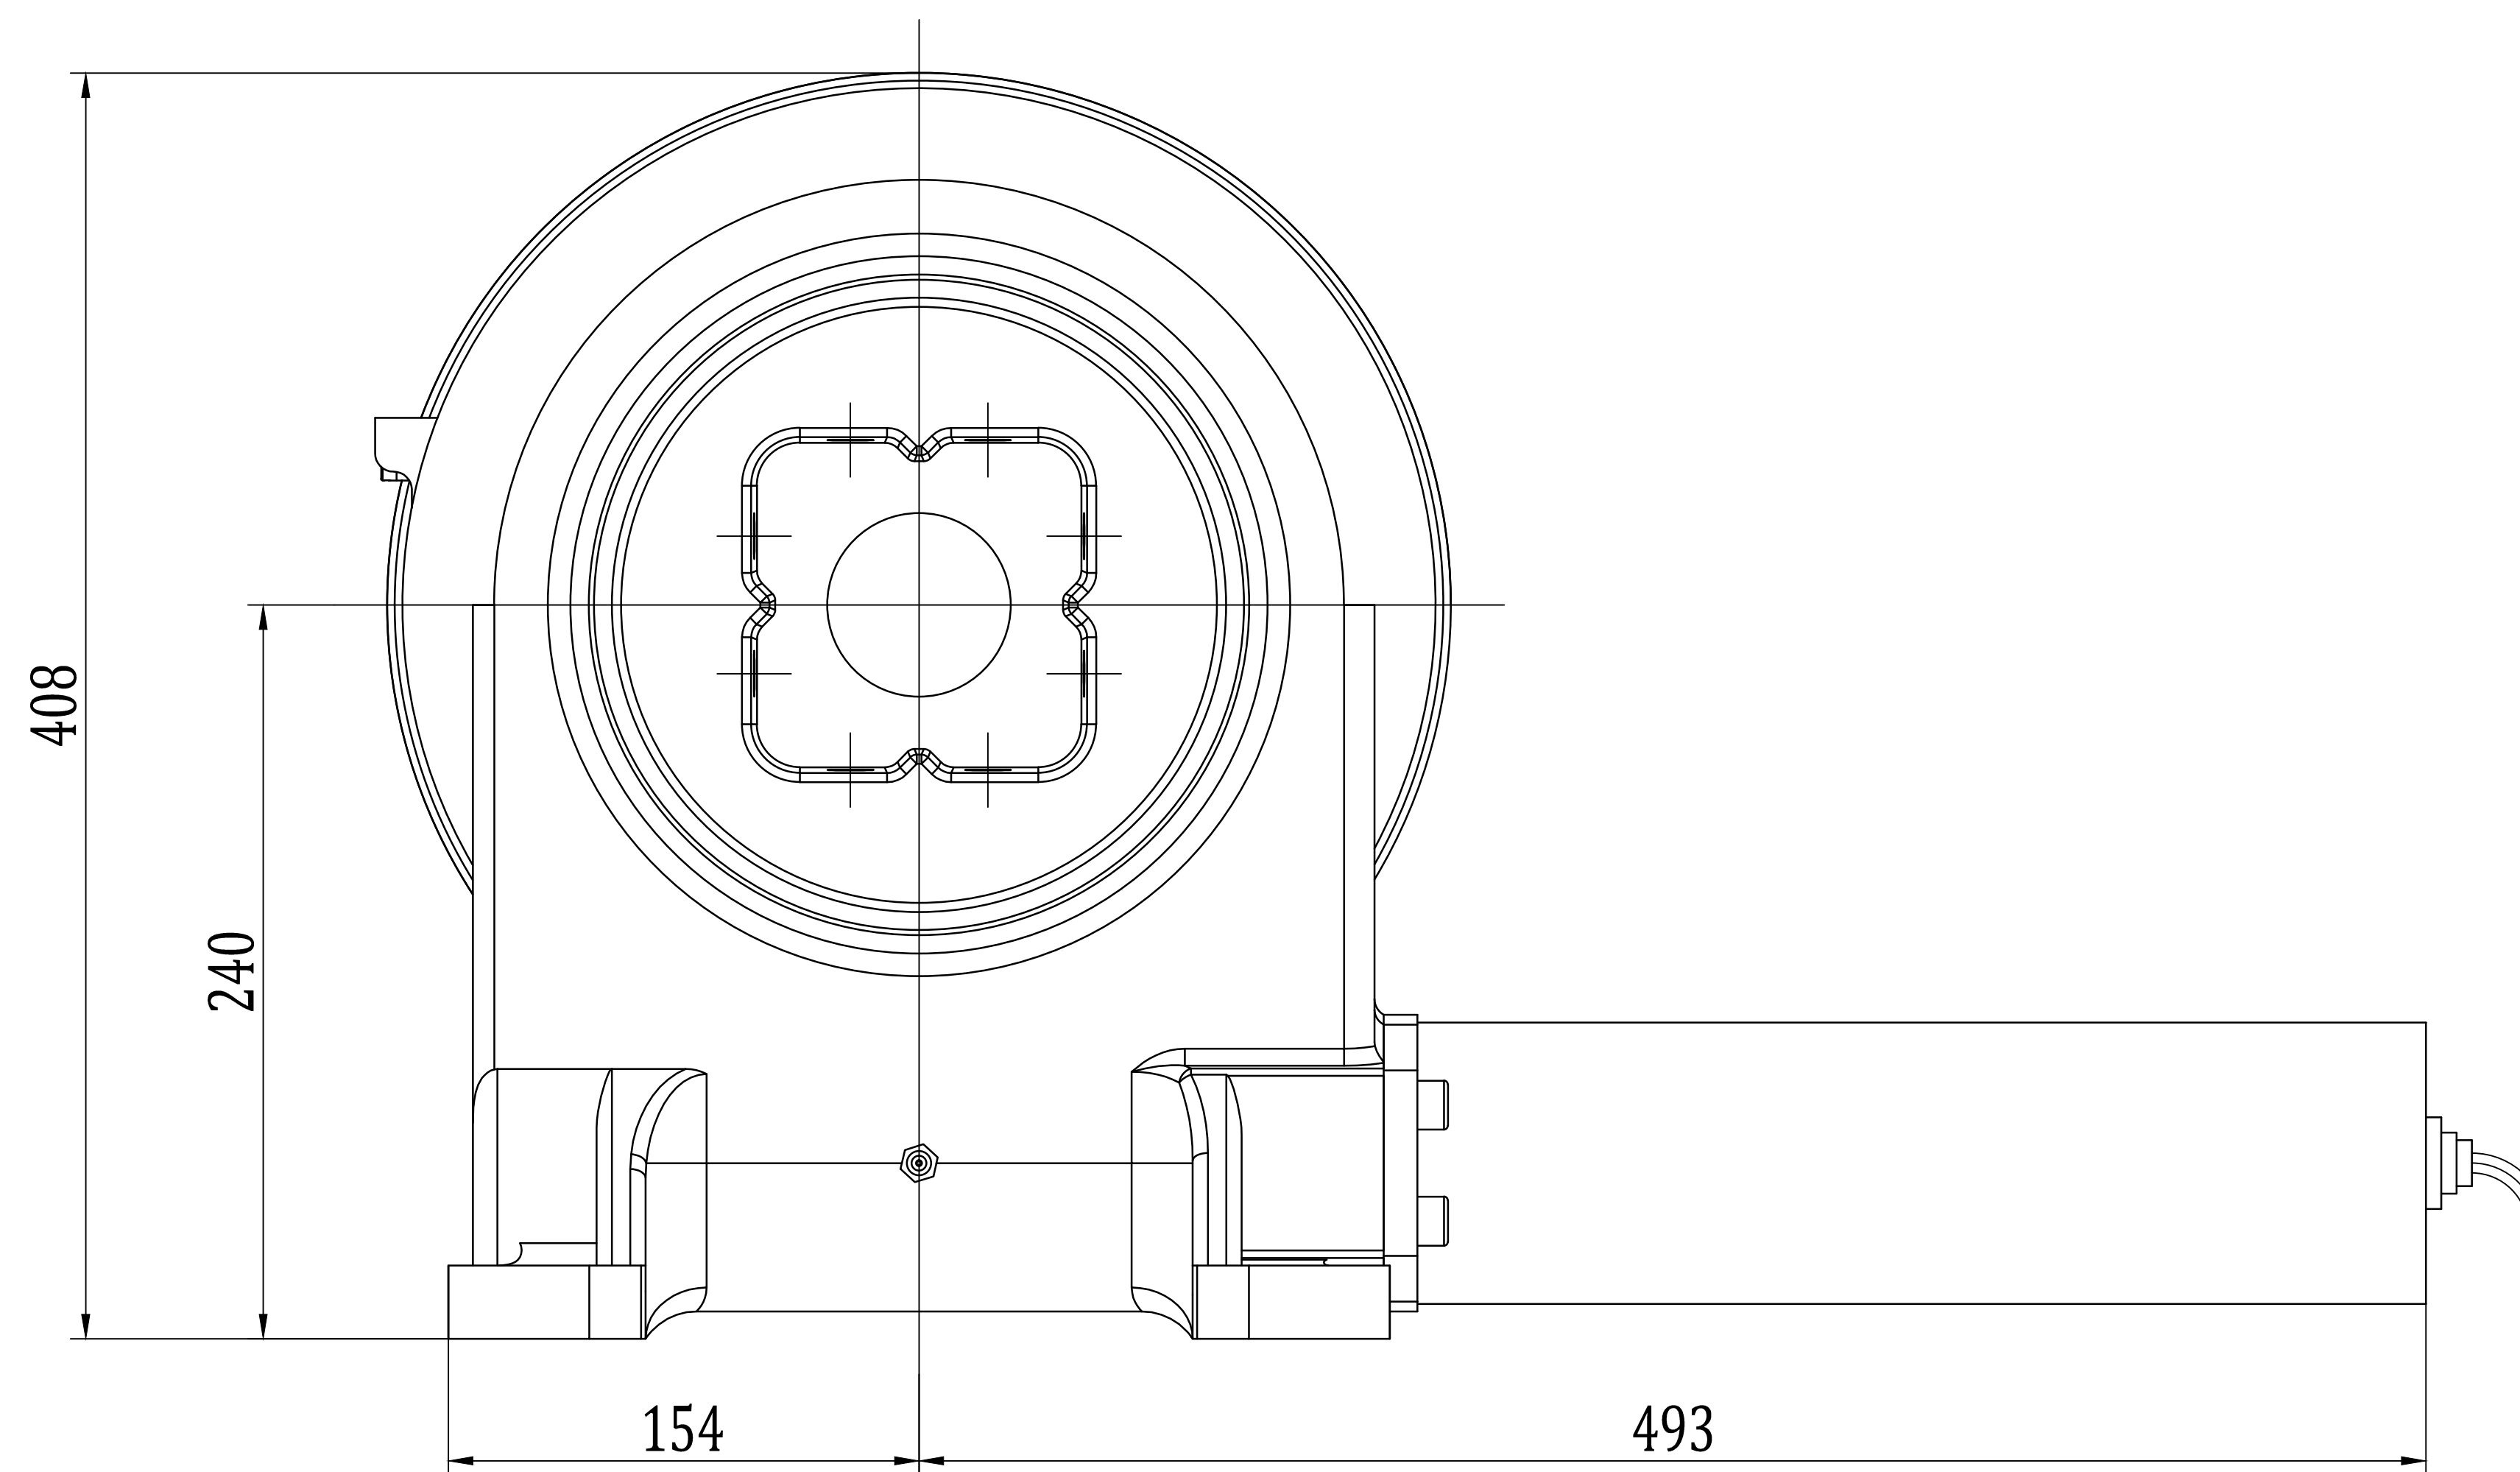
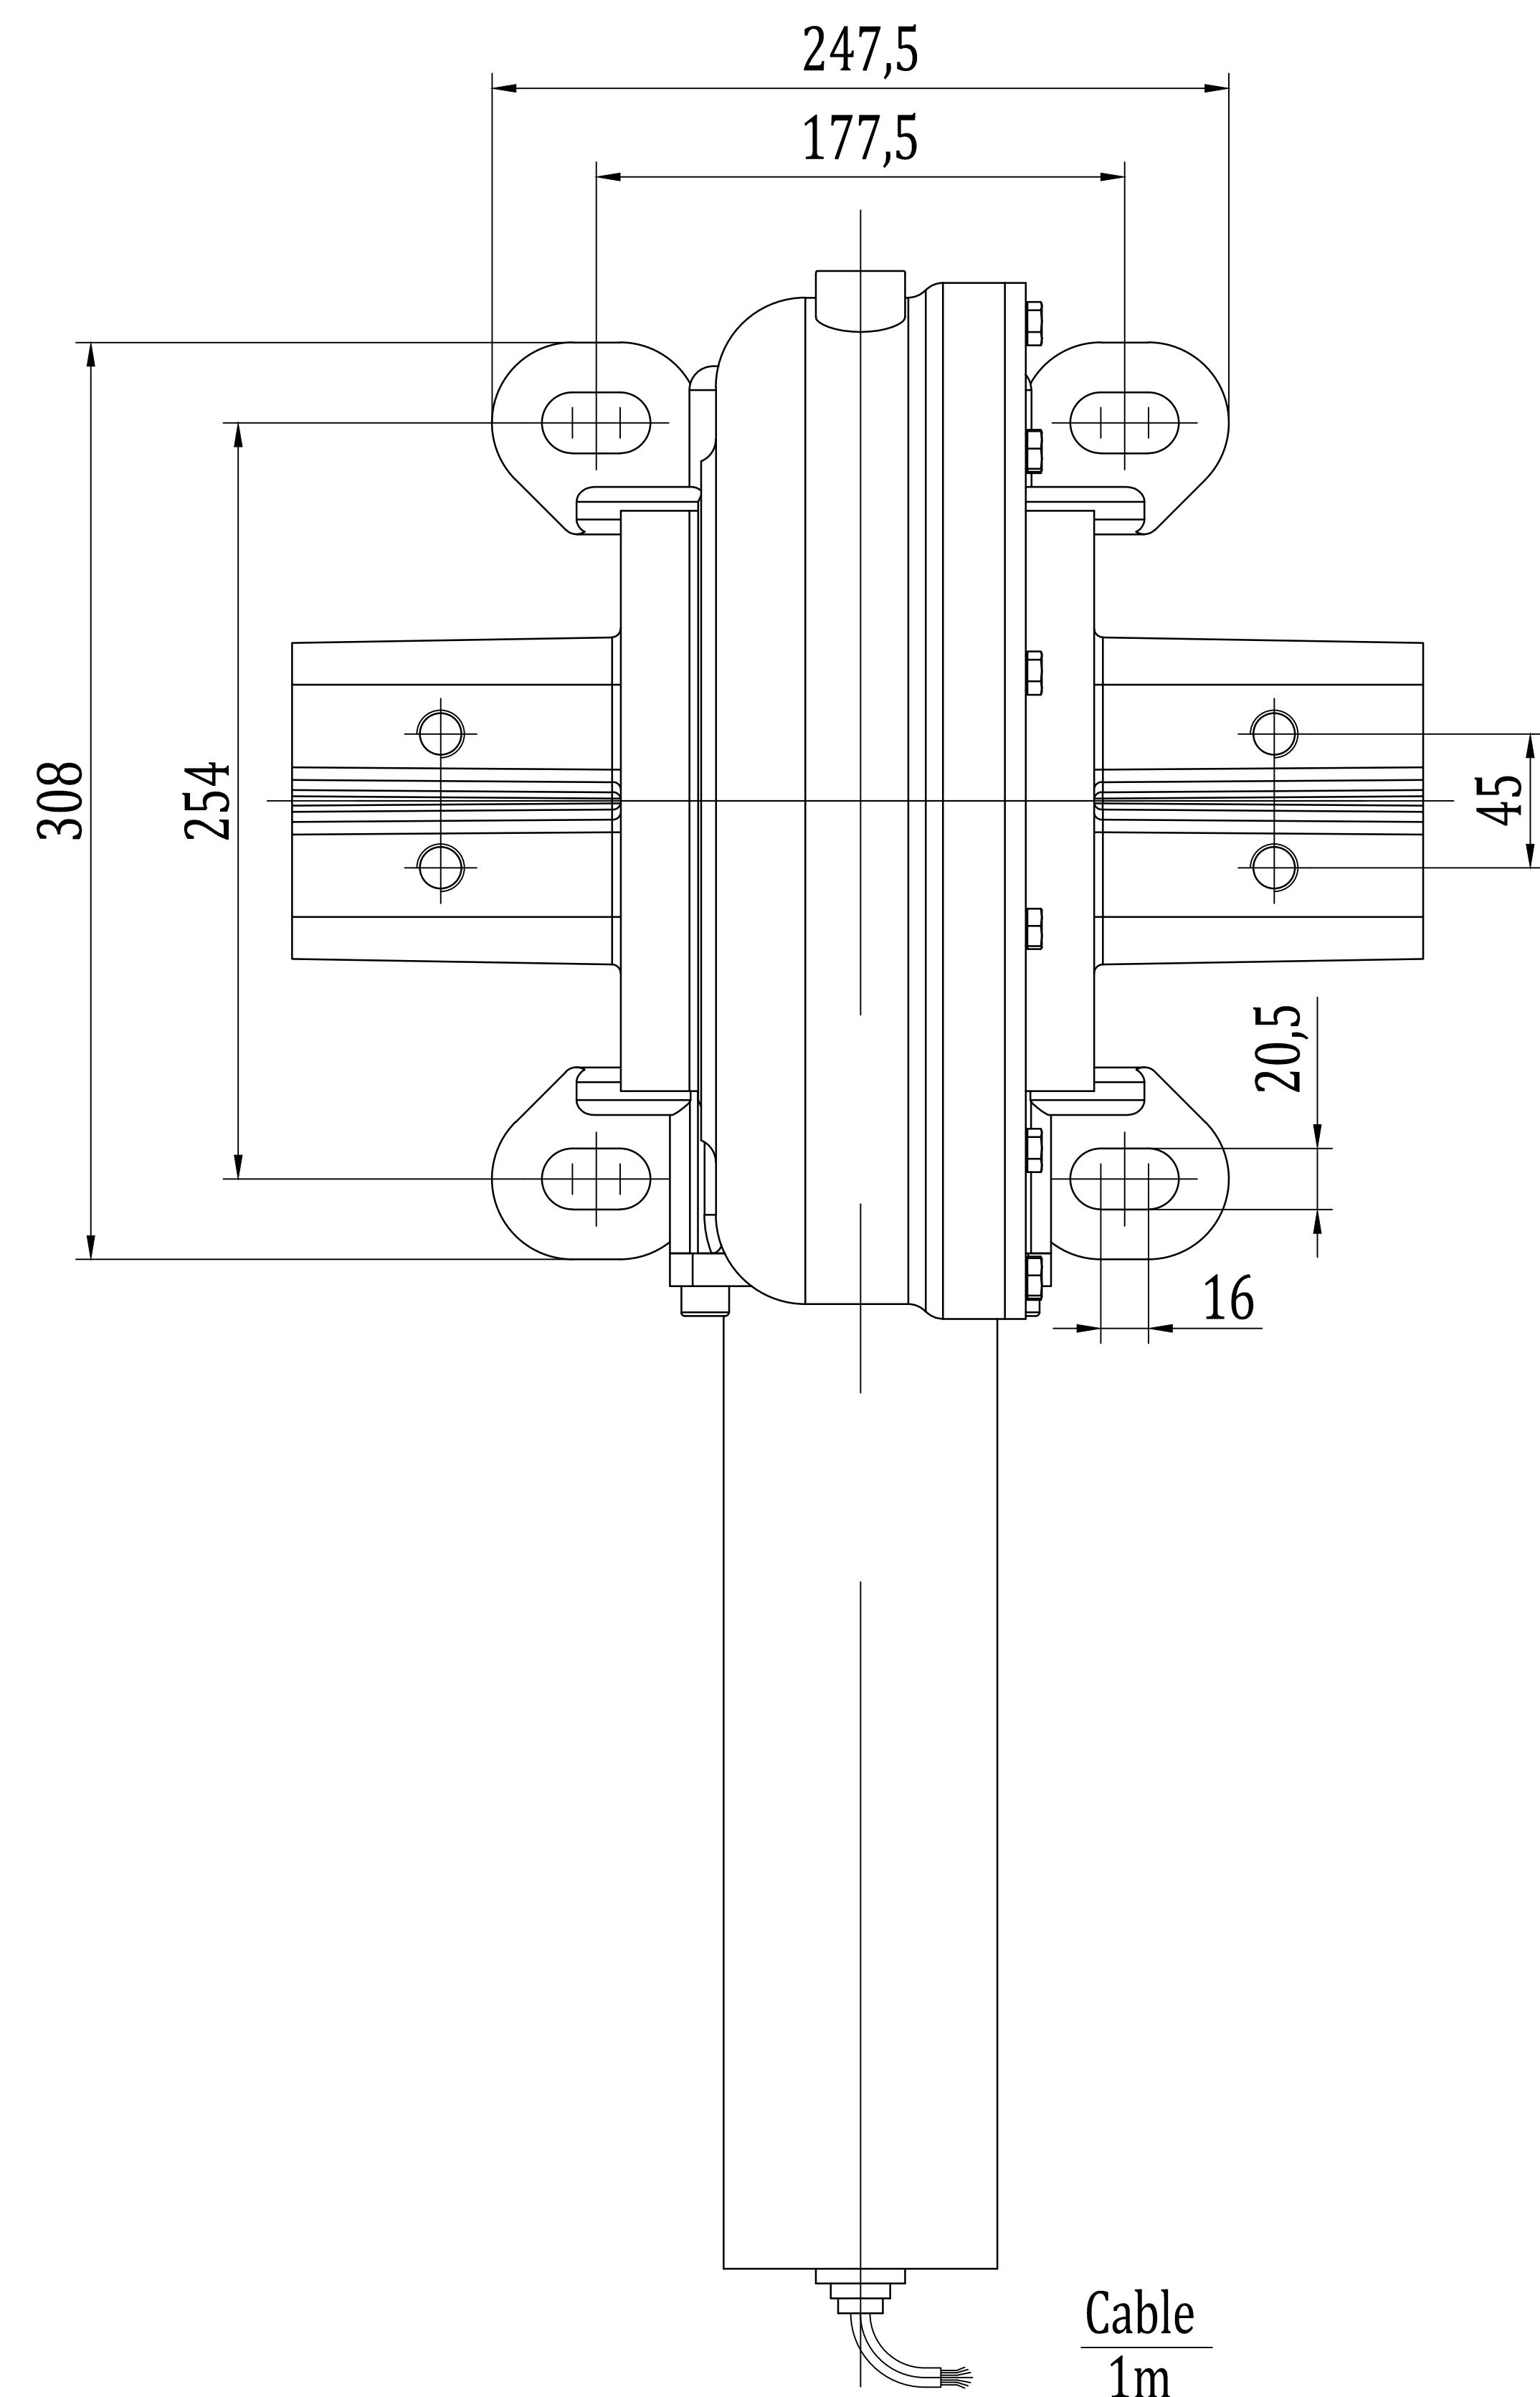
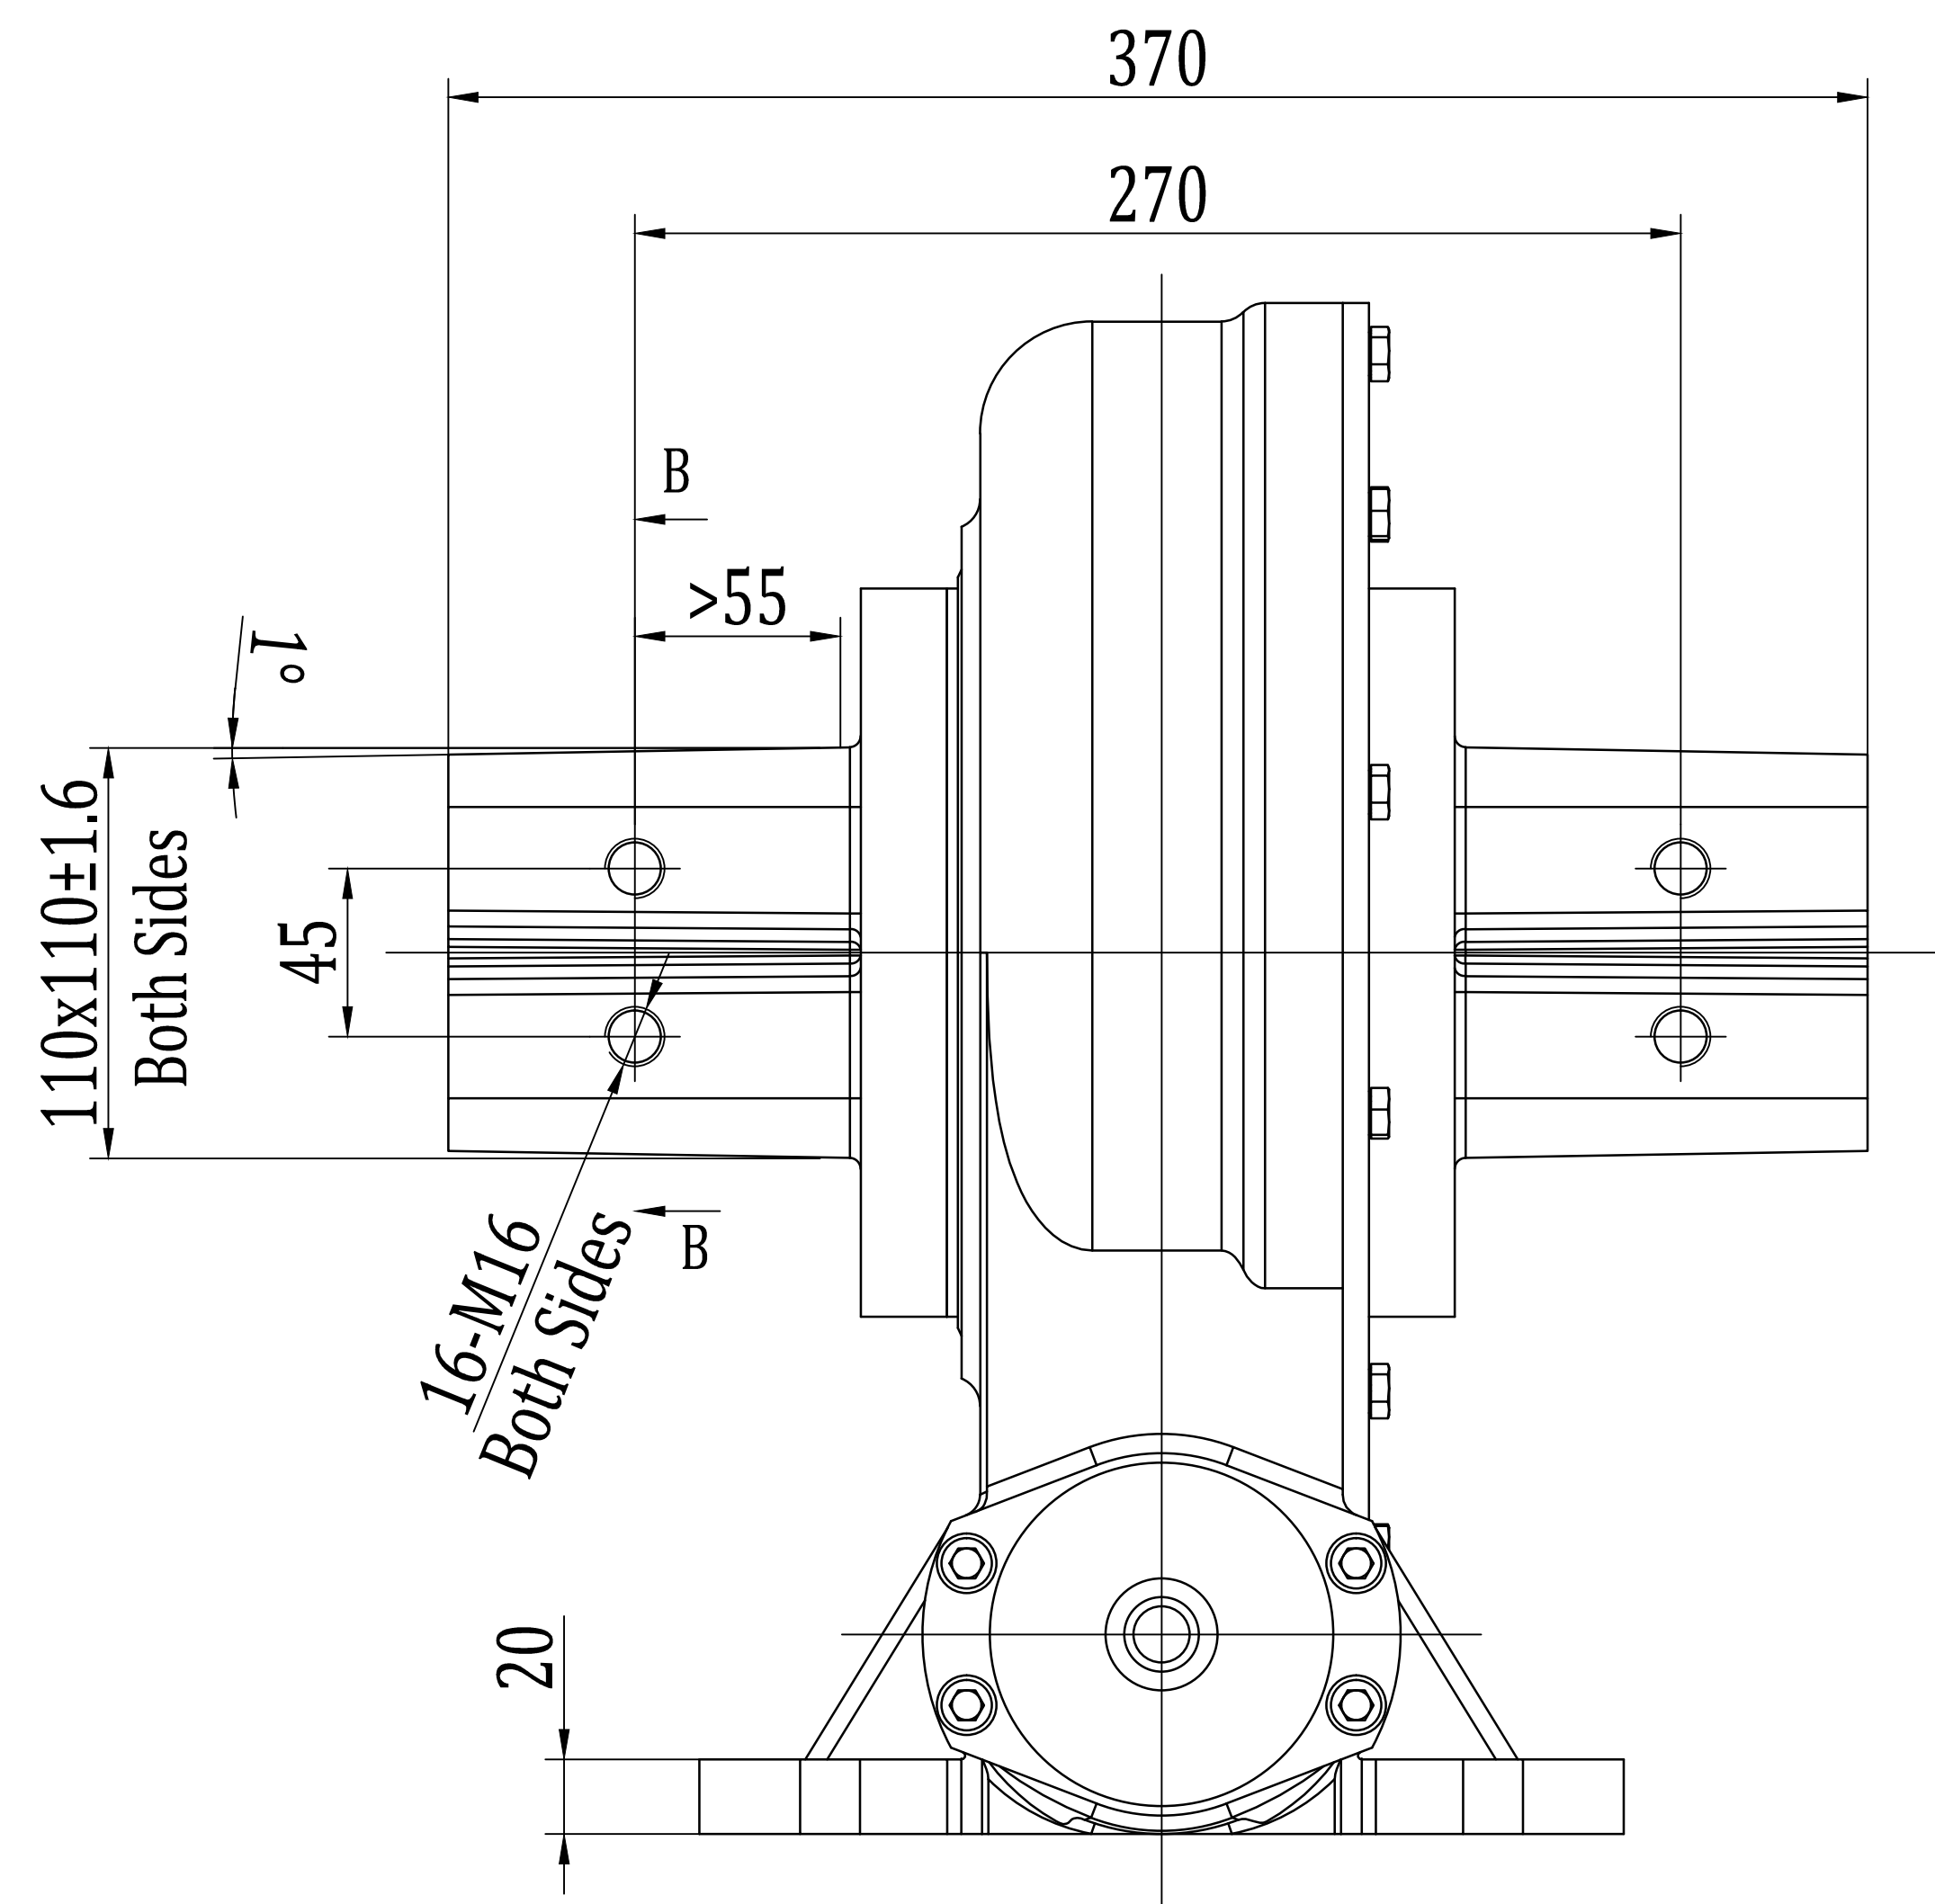


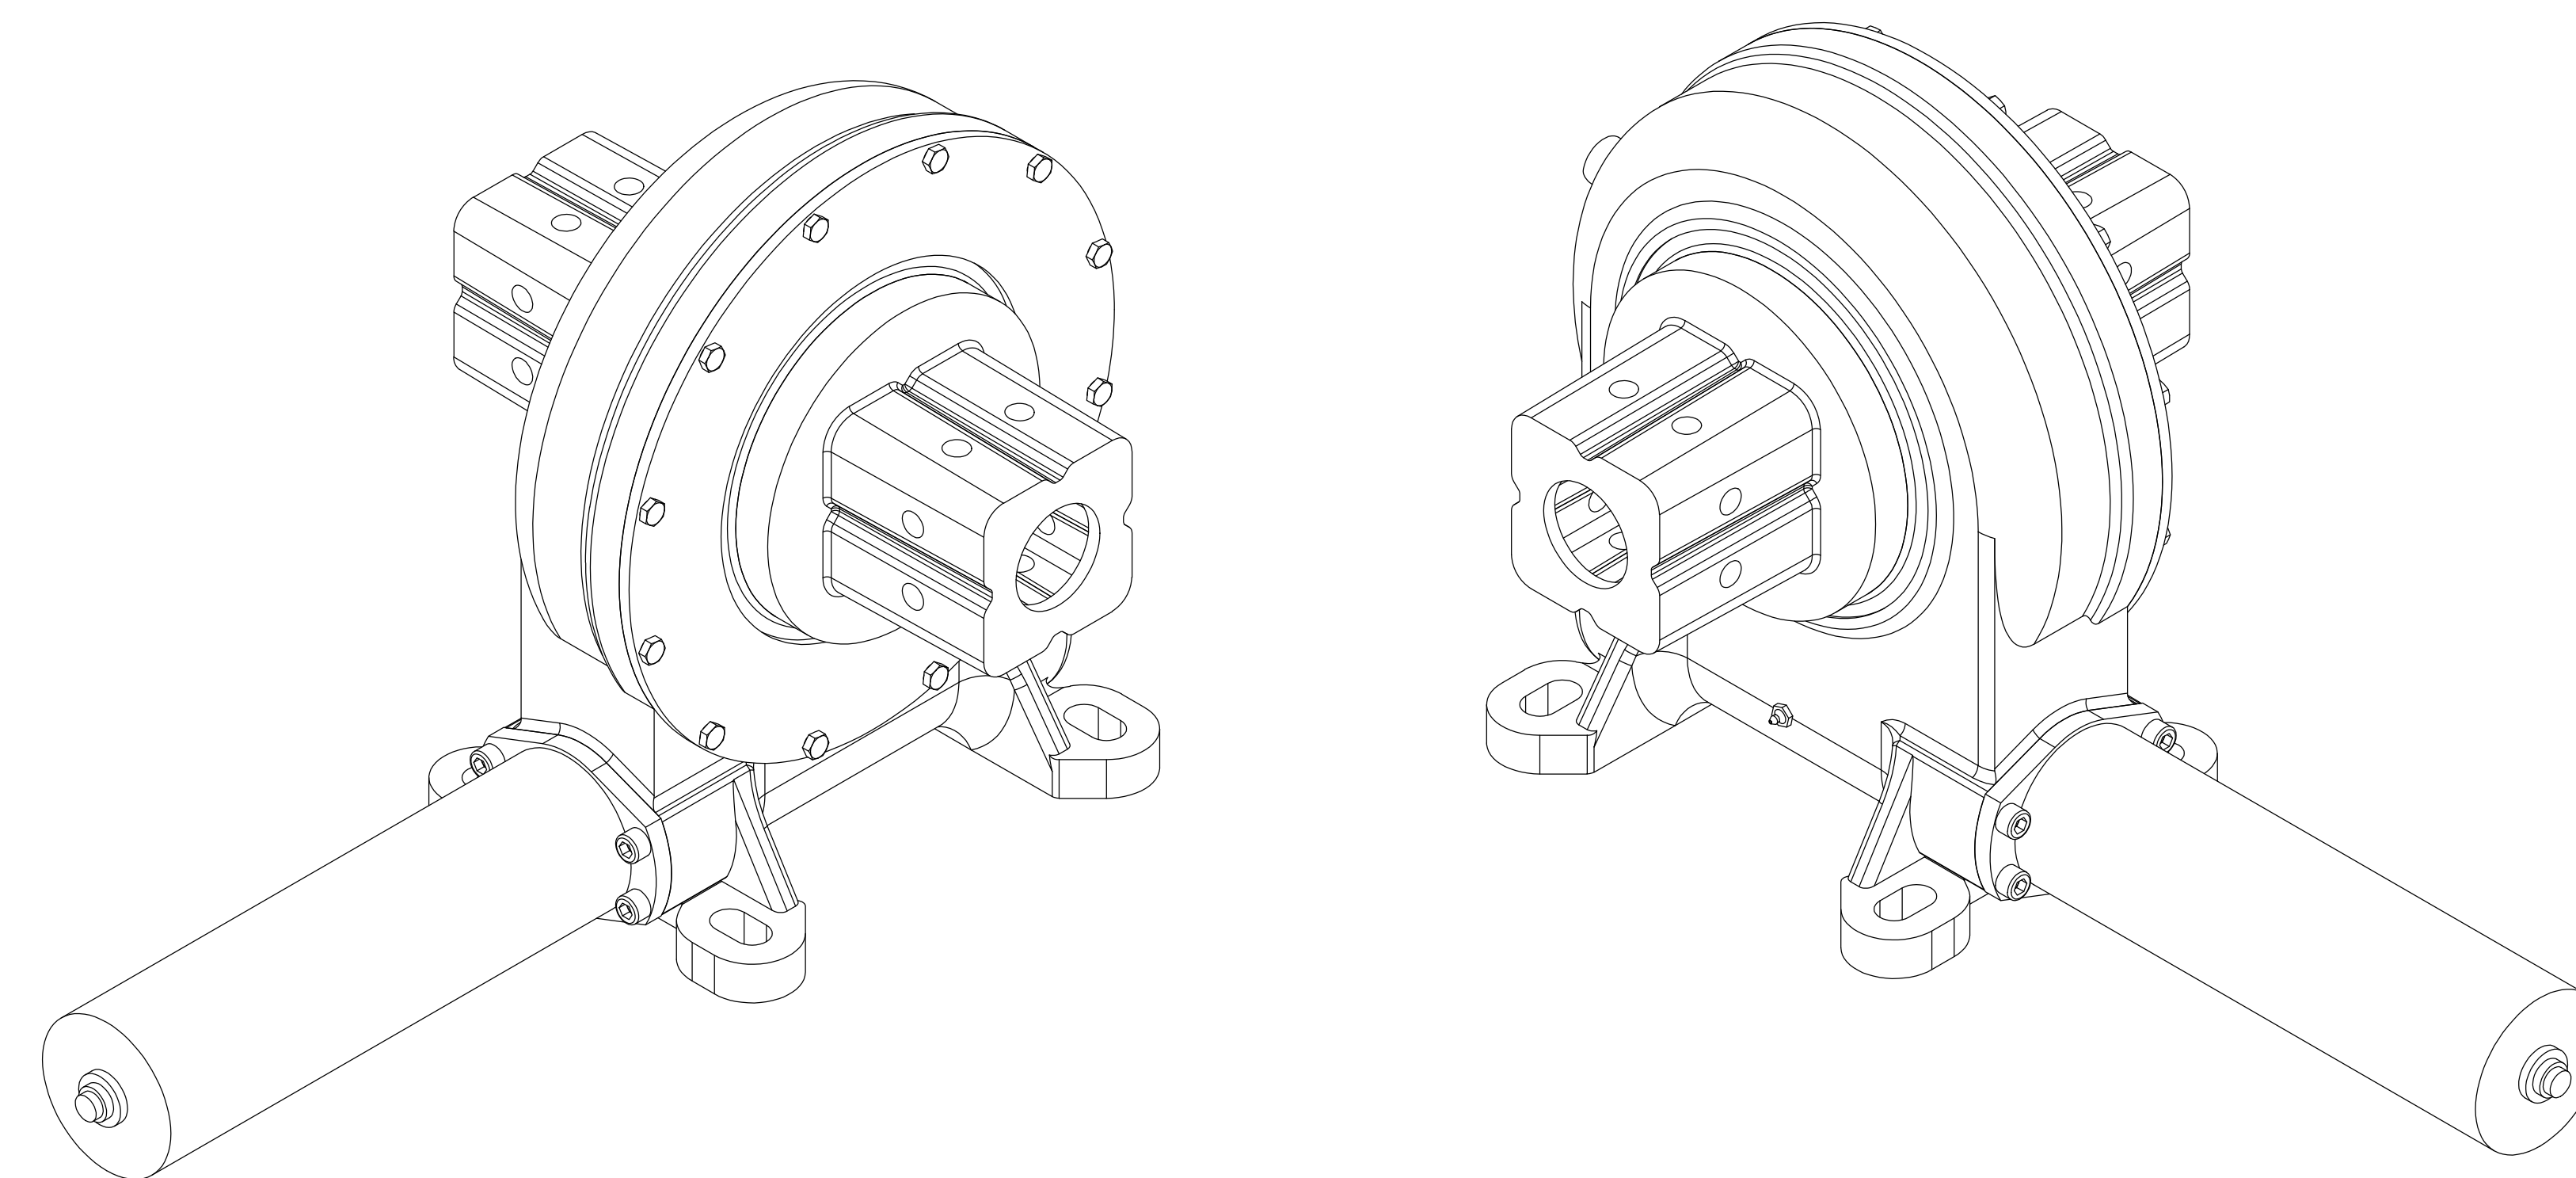

Wire Define	
Pin 1 (black)	motor -
Pin 2 (red)	motor +
Pin E (green)	GND

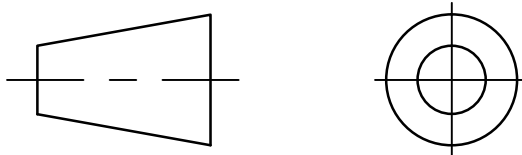

Slewing Drive Performance Parameters	
Rated Output Speed	0.025 rpm
Rated Output Torque	6405 N.m
Tilting Moment	15 kN.m
Holding Torque	56 kN.m
Static Axial Rating	338 kN
Static Radial Rating	120 kN
Dynamic Axial Rating	81 kN
Dynamic Axial Rating	61 kN
Corrison Protection	C3
Temperature	-30°C~+70°C
Gear Ratio	61 : 1
Hard Limit	±60°
Precision	≤ 0.2 °
24VDC Planetary Reducer Motor Performance Data	
Rated Output Torque	300 N.m
Rated Output Speed	1.5 rpm
Rated Current	≤6.5 A
IP Class	IP 65

REV	DATE	REVISER	REVISER					
DESIGNED BY	2020/7/28	Li Ming	 www.coresundrive.com Coresun Drive Equipment Changzhou Co.,Ltd.					
CHECKED BY	2020/7/28	Rui Wang						
APPROVED BY	2020/7/28	Shane Zhang						
ALL PROPRIETARY RIGHTS IN THE SUBJECT MATTER HERE OF ARE RESERVED, AND NO PERMISSION IS GRANTED OR TO DISCLOSE REPRODUCE THIS PRINT IN WHOLE OR IN PART, ANY OF THE INFORMATION TO OTHERS.			WEIGHT	SCALE	Slewing Drive			
			65Kg	1 : 5				
SYMBOLE ISO			SIZE	A3	VH9-61S110-RC-2415300			REV
			SHEET	1 / 1				A